








TRANSFORMER BOBBIN
INDUSTRIAL CO.,LTD.

Tel : 86-769-88789999 Fax : 86-769-88789989
http://tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS

REV	SYM	DRAFTER	CHECKER	DATE
①		X.H.GU	G.F.YANG	08/23/12
②		X.H.GU	G.F.YANG	02/05/13
③		X.H.GU	G.F.YANG	05/20/13

A 強度1.0Kg MIN

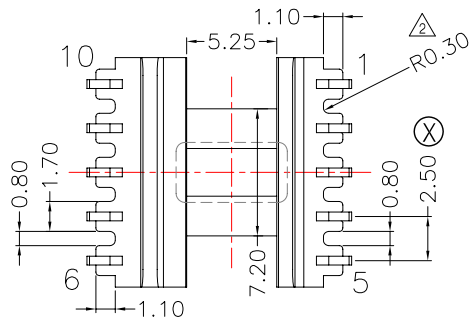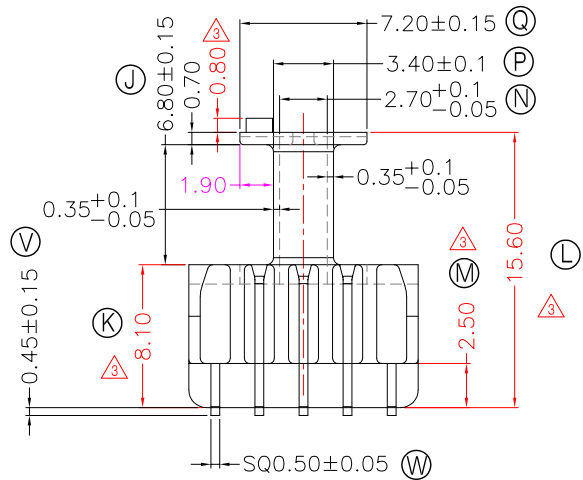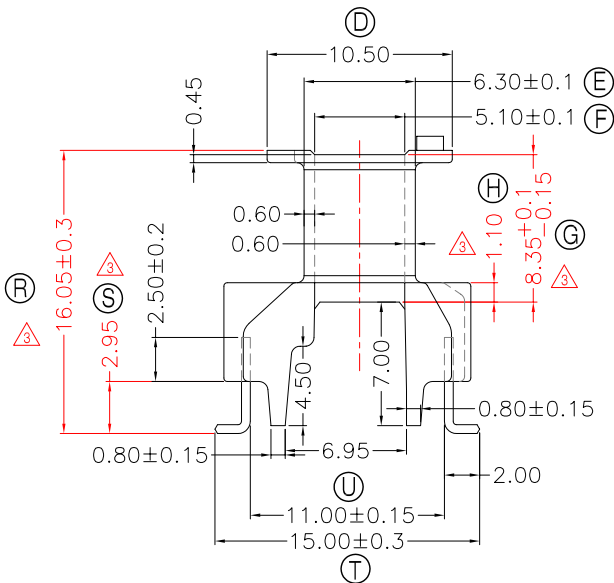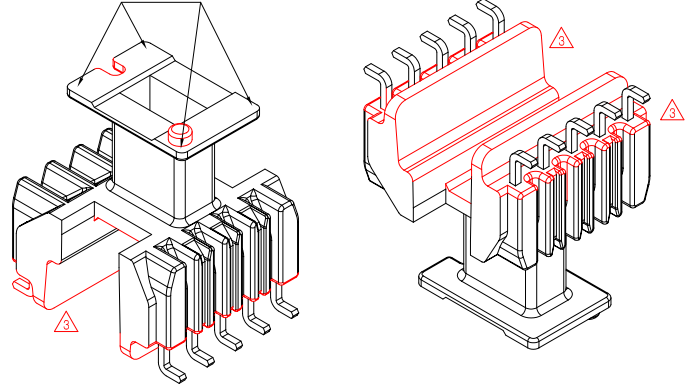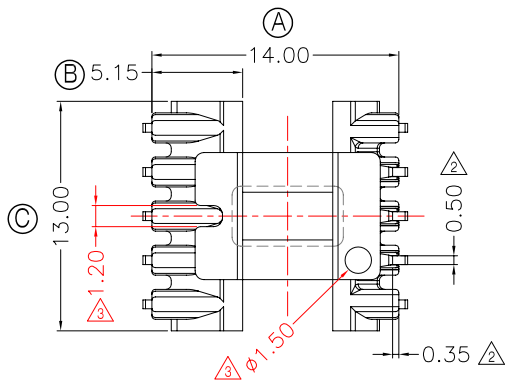

NOTE:

1. 焊錫前拉力:1.0KG MIN,焊錫後拉力:1.5KG MIN;
2. SMD PIN平整度(焊前≤0.1;焊後≤0.12)
3. 任意一點強度須1.5kg MIN;(除以下測試點.A.處為1.0MIN).
4. 耐壓4.0Kv /1.5mA 60S;
5. 焊錫溫度:450°±10° 3SEC
6. CORE TYPE :EE10/11.3

DWG NO. EE10-11-10P-L-B-11

PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
TBI-101-15021.1103	PM-9630	PB	Sn	ALL PIN 成品後電鍍	S
TBI-101-15021.1113	PM-9630	PB	Sn	CUT PIN #6,8,9 成品後電鍍	H
TBI-101-15021.1123	PM-9630	PB	Sn	CUT PIN #6,7,10 成品後電鍍	
TBI-101-15021.1133	PM-9630	PB	Sn	CUT PIN #5,6 成品後電鍍	
TBI-101-15021.1143	PM-9630	PB	Sn	CUT PIN #6,9,10 成品後電鍍	
TBI-101-15021.1153	PM-9630	PB	Sn	CUT PIN #5,6,7 成品後電鍍	
TBI-101-15021.1163	PM-9630	PB	Sn	CUT PIN #3,4,8 成品後電鍍	
TBI-101-15021.1173	PM-9630	PB	Sn	CUT PIN #8 成品後電鍍	
TBI-101-15021.1183	PM-9630	PB	Sn	CUT PIN #6,8,10 成品後電鍍	
TOLERANCE: 0<L<4:±0.1 4<L<16:±0.2 16<L<63:±0.3				UNIT : m / m	SCALE 1 : 1

Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.
2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min.
3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV 3